



6058


SAFETY CAGE SPECIFICATION USE SM

Biesheuvel Autosport is a KNAF certified company for installations off roll-bars
This roll bar is built in under Annexe J artikel 253 self construction

VEL Saf	fety Cage Manufacturer	Biesheuvel Autosport	ROLBEUGELS
5 R 1	Address	Rijksweg 37	
FIS BI		4255 GE Nieuwendijk	
A L	JTOSPOR	<u>Netherlands</u>	AUTOSPORT
VEL DO	Phone n° + Email	0031 183 403400 info@biesheuvel.nl	ROLBELIGELS


The structure shown on this form is manufactured for the following vehicle:

Make	FORD T O S P O R	Model	FOCUS RS	Year/Model Identifier	2010
Vehicle Homologation Number(s)* *if applicable		NASHEUVEL	ROLBEUGE	LS.NL	

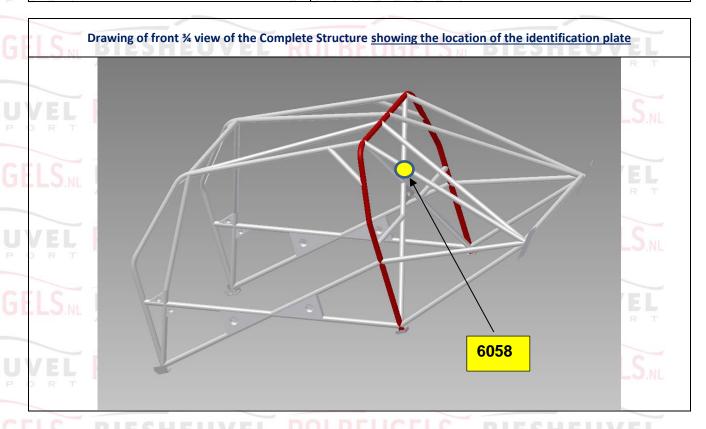





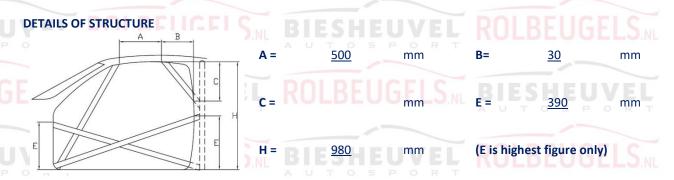

All Dimensions ± 5mm

R BIESHEUVEL ROLBEUGELS NL BIESHEUVEL

Method of attachment to Body Shell	Welded	
Weight of Safety Cage, inc. fastenings	<u>25</u> = S = = kg	ROLBEUGELS

LIF D1 D1 D1 D1 S E





6058

ROLBEUGELS BIESHEUVEL ROLBEUGELS

ELSN BIESHEUVEL ROLBEUGELSN BIESHEUVEL

All Dimensions <u>+</u> 0.1mm		Show location of each type on drawing				
Tube / Member	Label	Grade of Steel	External Diameter (OD)	Wall Thickness	Min. Tensile Strength	
Main Rollbar	<u>M</u>	E235EN/10305-1	45.0 mm	2.5 Mm	480 N/mm²	
Front/Lateral Rollbar	<u>L/F</u>	E235EN/10305-1	40.0 mm	2.5 Mm	480 N/mm²	
Backstays	S B P	E235EN/10305-1	40,0 mm	2.5 Mm	480 N/mm²	
Main rollbar Diagonal members	<u>D</u>	E235EN/10305-1	40.0 mm	2.0 Mm	480 N/mm²	
Backstay Diagonal members	<u>D1</u>	E235EN/10305-1	40.0 mm	2.0 Mm	480 N/mm²	
Reinforcements	<u>C</u>	E235EN/10305	40.0 mm	2.0 Mm	480 N/mm²	
Doorbars	<u>E</u>	E235EN/10305-1	40.0 mm	2.0 Mm	480 N/mm²	
Windscreen Pillar Reinforcements	s <u>C1</u> =	E235EN/10305-1	40.0 mm	2.0 U Mm O S	P O R N/mm²	
Harness Bar	<u>S</u>	E235EN/10305-1	40.0 mm	2.0 Mm	480 N/mm²	
OPTINAL TUBES	EUGE	LS.NL BIES	S ∃ ∃ ∪mm ∃	Mm	N/mm²	
OPTINAL TUBES	<u>01</u>	DIN2391 25CRM04	30.0 mm	2.5 Mm	700 N/mm²	
OPTINALTUBES	HELL	VEL ROL	RELIGHMIS	Mm	N/mm²	
AUT	0 S P	RT	mm	A U Mm O S	P O R N/mm²	
2010	FUC		mm	mm	N/mm²	
EL KULB	LUUL	LOW BIE	DA EUmm E	KU mm L	N/mm²	

Total length of all tubes < 40 mm OD	DEIIC mm	15 m maximum
TOW DIESHED AFF KOLL	DEUULLO	NE DIESHEO VEL

HEUVEL ROLBEUGELS

BIESHEUVEL

ROLBEUGELS.NI

UGELS BIESHEU

ROLBEUGELS.NI

BIESHEUVEL

HEUVEL

ROLBEUGELS

BIESHEUVEL

ROLBEUGELS.N

EUGELS.NL

BIESHEUVEL

ROLBEUGELS

BIESHEUVEL

Biesheuvel Autosport - Rolbeugels.nl

Page 3





6058

PHOTO 1 PHOTO 2 R T

PHOTO 1 FRONT ¾ VIEW OF CAGE



REAR ¾ VIEW OF CAGE



PHOTO 3
VIEW FROM SIDE OF CAR



PHOTO 4
MAIN ROLLBAR TO FLOOR ATTACHMENT



PHOTO 5
REAR BACKSTAY TO BODYSHELL ATTACHMENT



PHOTO 6
FRONT ROLLBAR TO FLOOR ATTACHMENT







6058

PHOTO 7
FRONT ROLLBAR TO "A" PILLAR ATTACHMENT



PHOTO 8
MAIN ROLLBAR TO "B" PILLAR ATTACHMENT




PHOTO 9
ATTACHMENT TO FRONT SUSPENSION




PHOTO
Chassis Identification Number



PHOTO 10
ANTI-INTRUSION DOORBAR - DRIVER



PHOTO 11 ANTI-INTRUSION DOORBAR – CO-DRIVER



BIESHEUVEL

ROLBEUGELS.NI

BIESHEUVE





6058

PHOTO 12 SHOULDER HARNESS ATTACHMENT - DRIVER



PHOTO 13 SHOULDER HARNESS ATTACHMENT – CO DRIVER



PHOTO 14 LOCATION OF INDENTIFICATION PLATE




PHOTO 16
DETAILS OF INDENTIFICATION PLATE



PHOTO 17 OTHER DETAILS OF CAGE



PHOTO 18
OTHER DETIALS OF CAGE



FT2'NF RIF2HFAAFI

ROLBEUGELS.NI

BIESHEUVEL





6058

1	V.I.N. or Chassis Identification Number	WF05XXGCC5HB57813 RUBEUGELS
	BABM51040JH28892	6058

MANUFACTURER'S DECLARATION AND DETAILS:

I declare that the Safety Cage Structure described on this form and fitted to the vehicle described above:

- was constructed and installed in accordance with the specifications and design shown herein.
- has been manufactured so that all aspects of the Safety Cage design, including configuration and strength requirements and welded and demountable joints and mountings, will be in conformity with the requirements of the FIA Homologation Regulations for Safety Cages.
- has been identified by an engraved plate bearing the name or logo of the manufacturer, (Biesheuvel Autosport)

Manufacturer's Name	Biesheuvel Autosport	AUTOSPORT
Address	Rijksweg 37	
VEL ROLBEUGELS	4255 GE Nieuwendijk	
TIC DIECHELINA	<u>Netherlands</u>	DIECHERINE
Phone n° + Email T O 5 P O F	0031 183 403400	Manufacturer Stamp — here
VEL ROLBEUGEL	BIESHEUVEL Insert signature heres PORT	
Name of Signatory#:	N Biesheuvel	BIESHEUVEL

MANUFACTURER'S AGENT: (For Safety Cages installed by an Agent)

The following Agent is authorised to act on the manufacturer's behalf to install this Safety Cage design.

Agent's Name	GB Metaal Techniek
Address B E S H E U V E	Bredesteeg 2 BEUGELS NL BIESHEUVEL
	4255 GH Nieuwendijk
VEL ROLBEUGELS	Netherlands ESHEUVEL ROLBEUGELS.NL
Phone n° + Email	0031 622607952 info@rolbeugels.nl

Instructions to the installer of the Safety Cage

EL ROLBEUGELS.NL BIESHEUVEL ROLBEUGELS.NL

