


## **VEL ROLSAFETY CAGE SPECIFICATION UGELS**


Biesheuvel Autosport is a KNAF certified company for installations off roll-bars This roll bar is built in under Annexe J artikel 253 self construction

According to homologation Nr 5350


| HEU   | VEL  | Safety Cage Manufacturer | Biesheuvel Autosport ROLBEUGELS       |
|-------|------|--------------------------|---------------------------------------|
|       |      | Address                  | Rijksweg 37                           |
| BEUGE | LSNL |                          | 4255 GE Nieuwendijk                   |
|       |      |                          | Netherlands                           |
| HEU   | VEL  | Phone n° + Email         | 0031 183 403400<br>info@biesheuvel.nl |
| OSP   |      |                          |                                       |

| The struct              | ure shown on this form is ma    | anufactured | for the following vehicle: In | stallation date; 07-01 2021 |
|-------------------------|---------------------------------|-------------|-------------------------------|-----------------------------|
| Make                    | OPEL                            | Model       | CORSA B                       | Year/Model Identifier       |
| Vehicle H<br>*if applic | lomologation Number(s)*<br>able | S.NL B      | 5516 HEUVEL                   | <b>ROLBEUGELS</b>           |

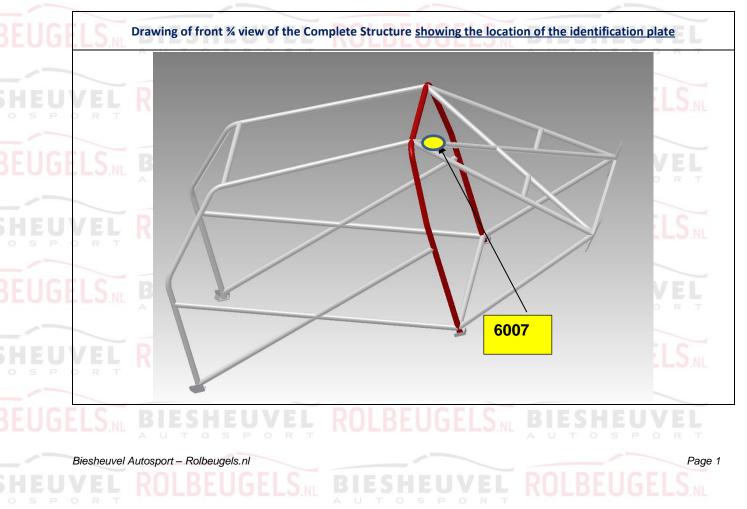

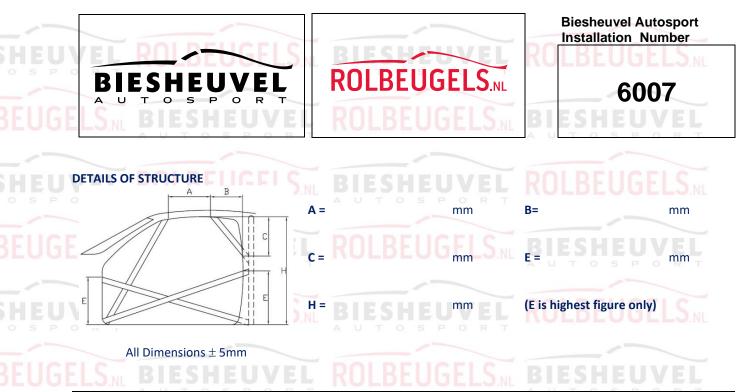

|   | Method of attachment to Body Shell     | Welded       |    |            |
|---|--|--------------|----|------------|
| J | Weight of Safety Cage, inc. fastenings | 2 <u>5</u> S | kg | ROLBEUGELS |

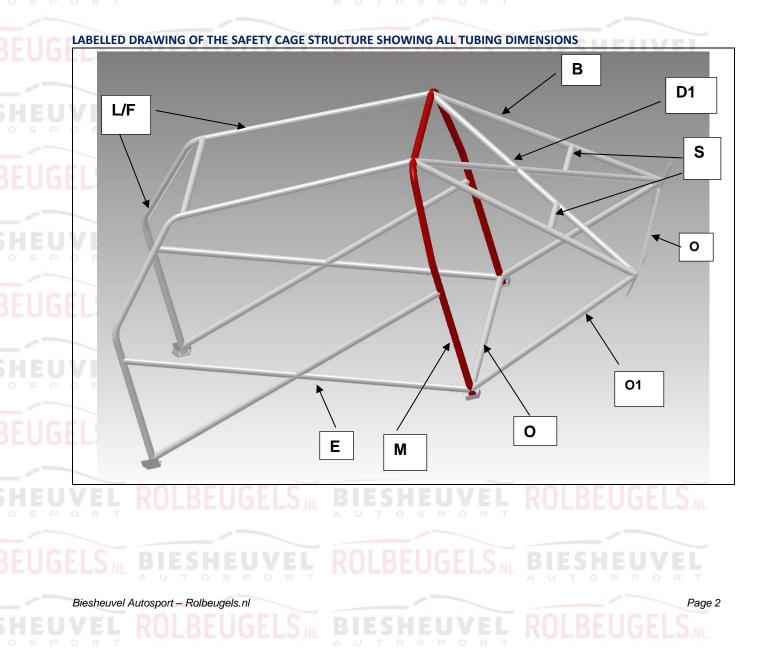







| All Dimensions <u>+</u> 0.1         | .mm        |                      | Show location of e                | each type on drawing |                          |
|-------------------------------------|------------|----------------------|-----------------------------------|----------------------|--------------------------|
| Tube / Member                       | Label      | Grade of Steel       | External Diameter<br>(OD)         | Wall<br>Thickness    | Min. Tensile<br>Strength |
| Main Rollbar                        | M          | E235EN/10305-1       | 45.0 mm                           | 2.5 Mm               | 480 N/mm <sup>2</sup>    |
| Front/Lateral Rollbar               | <u>L/F</u> | E235EN/10305-1       | 40.0 mm                           | 2.0 Mm               | 480 N/mm <sup>2</sup>    |
| Backstays                           | <u>B</u>   | E235EN/10305-1       | 40.0 mm                           | 2.0 Mm               | 480 N/mm <sup>2</sup>    |
| Main rollbar<br>Diagonal members    | D          |                      | mm                                |                      | N/mm <sup>2</sup>        |
| Backstay<br>Diagonal members        | <u></u> D1 | E235EN/10305-1       | 040.0 P mm R                      | 2.0 Mm               | 480 N/mm <sup>2</sup>    |
| Roof<br>Reinforcements              | CI         |                      | mm                                | Mm                   | N/mm <sup>2</sup>        |
| Doorbars                            | E E        | E235EN/10305-1       | 40.0 mm                           | 2.0 Mm               | 480 N/mm <sup>2</sup>    |
| Windscreen Pillar<br>Reinforcements | <u>C1</u>  |                      | mm                                | Mm                   | N/mm <sup>2</sup>        |
| Harness Bar                         | <u>S</u>   | E235EN/10305-1       | 40.0 mm                           | 2.0 Mm               | 480 N/mm <sup>2</sup>    |
| OPTINAL TUBES                       | 01         | DIN 2391<br>25CRM04  | 35.0 <sup>P</sup> mm <sup>R</sup> | 1.5 Mm               | 700 N/mm <sup>2</sup>    |
| OPTINAL TUBES                       | 0          | E235EN/10305-1       | 40.0 mm                           | 2.0 Mm               | 480 N/mm <sup>2</sup>    |
|                                     | <u>02</u>  |                      | SEUGENLS                          |                      | N/mm <sup>2</sup>        |
|                                     |            |                      | mm                                | Mm                   | N/mm <sup>2</sup>        |
| VEL ROLB                            | EUGE       | LS <sub>N</sub> BIES | SHEU <sup>mm</sup> /E             | ROMBEL               | N/mm <sup>2</sup>        |
| DRT                                 |            | A U T                | OSPOR<br>mm                       | mm                   | N/mm <sup>2</sup>        |
|                                     |            |                      | DELICELC                          | DIECUI               |                          |

15 m maximum









Page 3

Biesheuvel Autosport - Rolbeugels.nl



## BEUGELS.NL BIESHEUVEL ROLBEUGELS.NL

PHOTO 1 FRONT ¾ VIEW OF CAGE

РНОТО 3

VIEW FROM SIDE OF CAR

SEUGE SHEUGE



REAR ¾ VIEW OF CAGE



PHOTO 4 MAIN ROLLBAR TO FLOOR ATTACHMENT



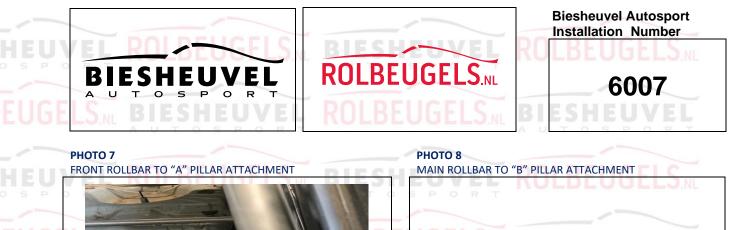


PHOTO 6 FRONT ROLLBAR TO FLOOR ATTACHMENT



Page 4

Biesheuvel Autosport – Rolbeugels.nl



SEUGE SEUGE





PHOTO 9 DO LO PLOCE SALES

ROLBEUGELS.M.

S.NL BIESHEUVEL RO

PHOTO Chassis Identification Number

Colonoz ov. respect

PHOTO 10 ANTI-INTRUSION DOORBAR - DRIVER




PHOTO 11 ANTI-INTRUSION DOORBAR – CO-DRIVER



BIESHEUVEL A U T O S P O R T

Page 5

Biesheuvel Autosport – Rolbeugels.nl

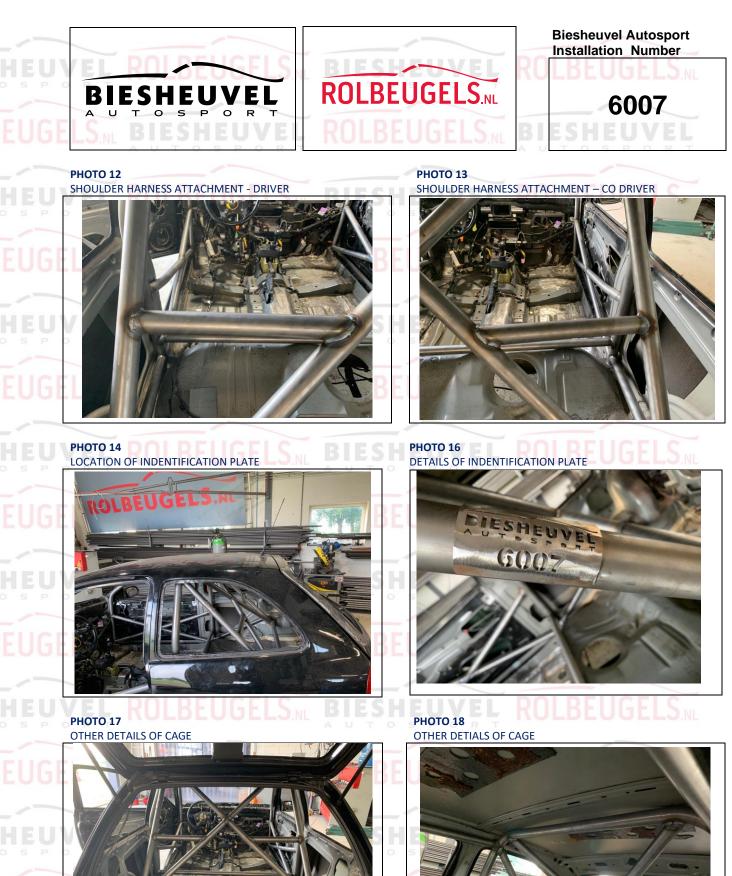



Page 6

Biesheuvel Autosport - Rolbeugels.nl

|   |  |   | Biesheuvel Autospo<br>Installation Number |
|---|--|---|---|
| EL POLATION   | ELS  | BIESHEUVEL  | ROLBEUGELS                                |
| BIESHEUVI   | EL   | <b>ROLBEUGELS</b> .NL   | 6007                                      |
| S BIESHEU   | VEL  |   | BIESHEUVE                                 |
| AUTOSP  | ORT  |   | AUTOSPOR                                  |
| V.I.N. or Chassis Identification Nu                                 | umber  | WOL000073U4168853   | <b>ROLBELIGELS</b>                        |
| Safety cage identification Numbe                                    |  | 6007  | NOLDLOGLLO                                |
|   | VEI  |   | RIECHEIIVE                                |
| equirements and welded and dem<br>Iomologation Regulations for Safe | nountable join<br>ety Cages.<br>raved plate be<br>Bies<br>Rijks<br>4255<br>Net | cts of the Safety Cage design, in<br>the sand mountings, will be in confor<br>earing the name or logo of the man<br>sheuvel Autosport<br>weg 37<br>GE Nieuwendijk<br>herlands<br>183 403400<br>Obiesheuvel.nl | mity with the requirements of th          |
| Signature:  | ELS  | BIESHEUVEL<br>asignature heres PORT   | ROLBEUGELS                                |
| Name of Signatory#:   | N Bies   | sheuvel BEUGELS.N   |   |
| Agent's Name  | to act on the r  | stalled by an Agent)<br>manufacturer's behalf to install this<br>Metaal Techniek  | s Safety Cage design.                     |
| Address BLESTED   | Brede  | steeg 2 DE OGELSM   |   |
|   | 4255   |   |   |
|   | 4255   | <u>GH Nieuwendijk</u>   |   |
| EL ROLBEUG  | Nethe  | erlands SHEUVEL   | ROLBEUGELS                                |
| <b>Phone n° + Email</b>   | <u>Nethe</u>   |   | ROLBEUGELS                                |
| Phone n° + Email  | Nether<br>0031<br>info@  | erlands<br>622607952<br>Prolbeugels.nl  | ROLBEUGELS                                |
| EL ROLBEUG  | Nether<br>0031<br>info@  | erlands<br>622607952<br>Prolbeugels.nl  | ROLBEUGELS<br>BIESHEUVE                   |
| Phone n° + Email  | Nether<br>0031<br>info@  | erlands<br>622607952<br>Prolbeugels.nl  | ROLBEUGELS                                |
| Phone n° + Email  | Nether<br>0031<br>info@  | erlands<br>622607952<br>Prolbeugels.nl  | ROLBEUGELS<br>BIESHEUVE<br>BIESHEUVE      |
| Phone n° + Email  | Nether<br>0031<br>info@  | erlands<br>622607952<br>Prolbeugels.nl  | ROLBEUGELS                                |

